



Carlent – CarboPlus

CarboPlus modules, the latest innovation in carbon depth treatment.

Introduction


CarboPlus modules, the latest innovation in carbon depth treatment, offers increased carbon weight and increased carbon contact time in comparison to a standard carbon lenticular module. Designed to fit into industry standard housings CarboPlus modules can directly replace standard lenticular modules



Dimensions

	CarboPlus module	Standard module
Diameter (mm)	400 +/- 3	400 +/- 3
Compressed modules height including 2 flat gaskets (mm)	275 +/- 3	275 +/- 3
Quantity of cells (standard)	10	16
Volume of treatment media (litres)	21.11	16.89
Grade	Weight of available carbon per module (kg)	
ICN	3.5	2.8
PCN	3.5	2.8
MCN	3.5	2.8
QCN	3.5	2.8
ACN	3.5	2.8

Carlent – CarboPlus

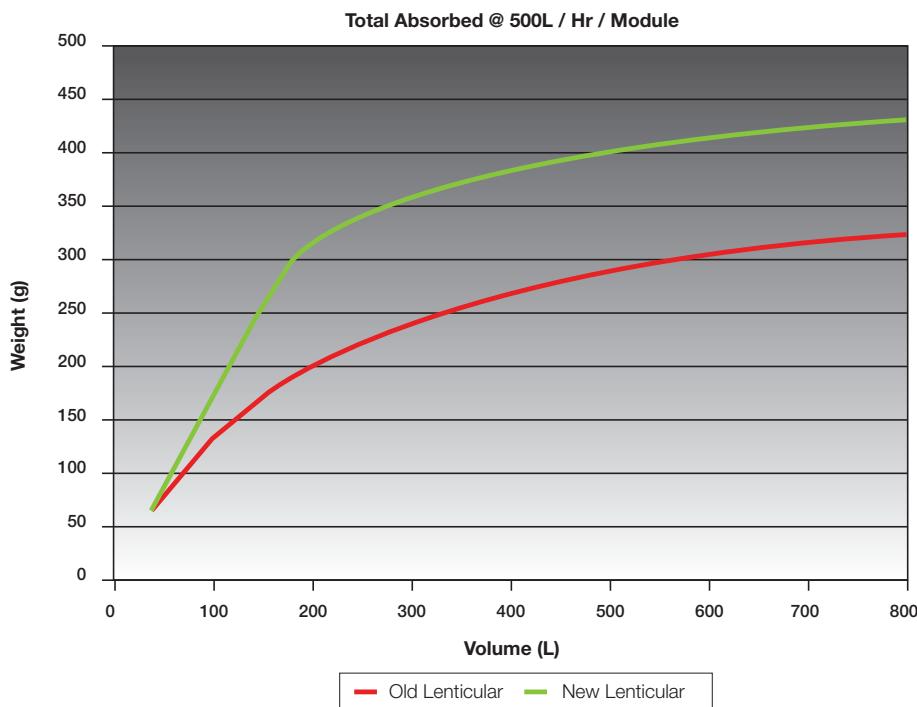

Benefits

- CarboPlus modules offer 25% more carbon capacity than standard carbon modules
- The flow rate through a CarboPlus module can be increased by 25% without affecting the treatment efficiency
- Offers increased contact time
- The totally enclosed construction of the system is ideal where hygiene is important or the conditions hazardous
- Eliminates the need for loose activated carbon powder or granules, giving more effective carbon use (fewer kg of carbon required)

Lenticular Module Operating Parameters	
Max Operating Temperature	95°C
Max Δ Pressure	2.5 bar
Max Back Δ Pressure	0.5 bar



CARLSON FILTRATION LTD

BUTTS MILL BARNOLDSWICK LANCASHIRE UNITED KINGDOM
BB18 5HP TEL: +44 (0) 1282 811000 FAX: +44 (0) 1282 811001
EMAIL: sales@carlson.co.uk

visit us at: carlson.co.uk



INVESTORS
IN PEOPLE



ISO 9001 : 2008

Investors in People

DMF No 14255